


COHO RANGE

Hour meters for totalling the operating time of machines or equipment for control and maintenance.

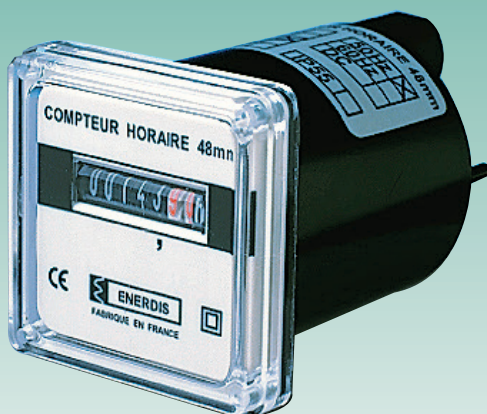

GENERAL SPECIFICATIONS

Reference standard: NFC 42310

Display: without reset function, white on black background, decimals in red
Height of digits: 4 mm
AC and DC capacity: 99,999.99 h
Operating indicator: scrolling 1/100 h every 36 s

Motor in Vac/Vdc: pulse + electronic counter

Consumption:

0.5 VA in 24 Vac/dc,

1.5 VA in 48 Vac/dc,

2 VA in 110/230 Vac,

6 VA in 400 Vac

Operating range:

Voltage Vac: -15% +10%

Frequency: ± 5 Hz

Voltage Vdc: $\pm 20\%$

Insulation: double

Dielectric test voltage:

5.5 kV - 50 Hz - 1 min

Environment:

Operating temperature: -10°C to +60°C

Relative humidity: < 95% at +45°C

Protection rating on front panel:

standard: IP50 / variant: IP55

Electromagnetic compatibility

(emission and immunity): EN 61326-1

Mounting:


Standard version: elastic joint

IP55 version: joint + strap

Weight: 180 g

Connection: 6.35 Faston clips + terminal covers included

Panel drilling

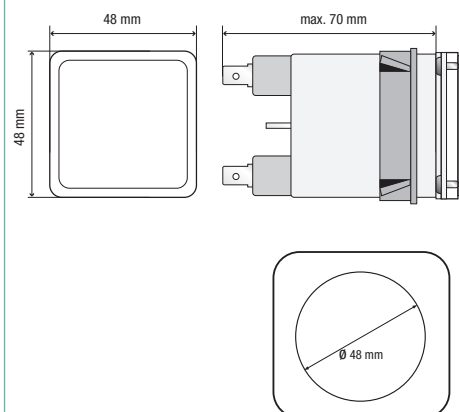

- For harsh environments
- High-reliability range

Format		48 x 48 (IP50)	48 x 48 (IP55)
Frequency	Voltage		
50 Hz	24 V	COHO 0606	COHO 1606
	48 V	COHO 0607	COHO 1607
	110 V	COHO 0608	COHO 1608
	230/400 V	COHO 0610	COHO 1610
60 Hz	24 V	COHO 0627	COHO 1627
	48 V	COHO 0628	COHO 1628
	110 V	COHO 0629	COHO 1629
	230/400 V	COHO 0631	COHO 1631
DC	24 V	COHO 0604	COHO 1604
	48 V	COHO 0605	COHO 1605