


FREQUENCY METER

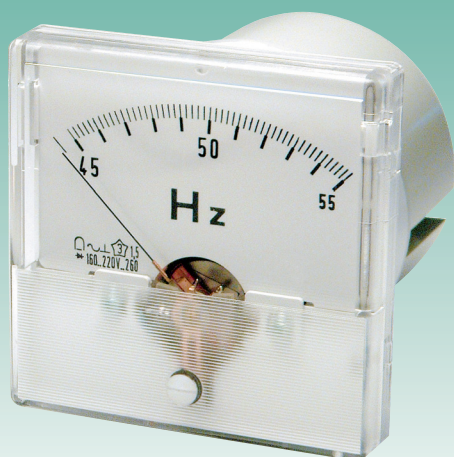

Pointer frequencymeter

90° DEFLECTION

Accuracy class: 0.5 Fn

Measuring component : moving coil
+ frequency converter

Operating range: 0.8 Un to 1.15 Un

Consumption : 1 VA with 100 V, 1.5 VA with 230 V, 2 VA with 400 V

CH version with built-in hour meter from 0 to 99999.9 hours in 96 x 96 format

FEASIBILITY LIMITS

Voltage: 57.7 V to 440 V

Frequency: 50 to 400 Hz

Deflection		90°		
Format		48 x 48	96 x 96	96 x 96 CH
Rated voltage	Measurement range			Hour meter
100 V	45-55 Hz	3582 3511	3583 3511	3583 3371
	55-65 Hz	3582 3521	3583 3521	3583 3381
230 V	45-55 Hz	3582 3512	3583 3512	3583 3372
	55-65 Hz	3582 3522	3583 3522	3583 3382
400 V	45-55 Hz	3582 3513	3583 3513	3583 3373
	55-65 Hz	3582 3523	3583 3523	3583 3383

CUSTOMIZED PRODUCT

	Format	Voltage	Measurement range	Hour meter
Example	72 x 72	150 V	350-450 HZ	☒

ASSOCIATED PRODUCTS



Accessories

Seal, ring fastener, dial, sleeve, etc.
page 215



TRIAD 2

Digital transducers
1 to 4 analog outputs.
Class 0.1
page 156