


TCRO RANGE

TCRO 2030

Bar : 20 x 30 mm

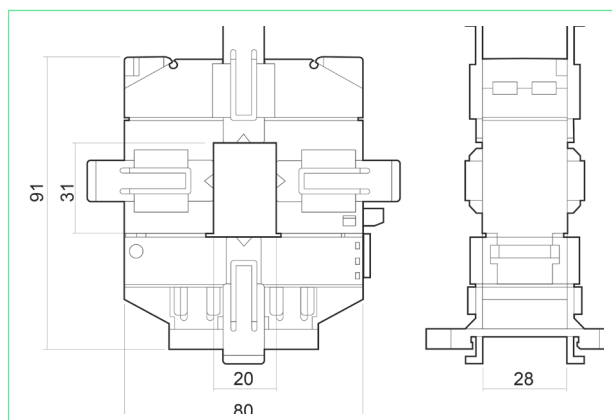


Power VA in Class

Primary	0.5	1	3
100/5A	-	-	1
150/5A	-	-	1
200/5A	-	-	2
250/5A	-	1	2
400/5A	1	2.5	4

TCRO 6080

Bar : 60 x 80 mm

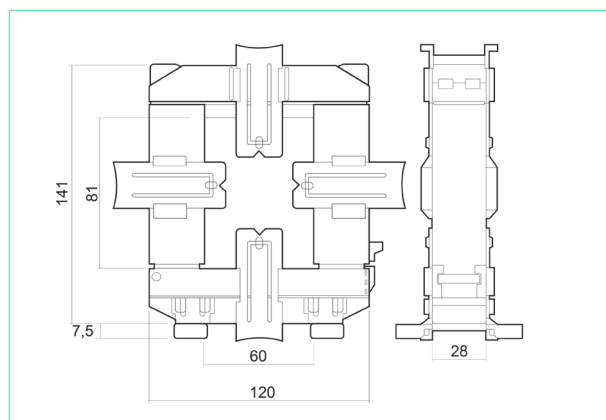

Power VA in Class

Primary	0.5	1	3
400/5A	1	1.5	3
500/5A	2	5	7.5
600/5A	2	5	8
800/5A	3	6	10
1000/5	5	8	15

TO ORDER

Primary	Secondary 5 A
100/5A	P01340300
150/5A	P01340301
200/5A	P01340302
250/5A	P01340303
400/5A	P01340304

Primary	Secondary 5 A
400/5A	P01340305
500/5A	P01340306
600/5A	P01340307
800/5A	P01340308
1000/5	P01340309

ASSOCIATED PRODUCTS



PRTC

CT short-circuiter


Protection against hazards due to opening of the secondary circuit of a low-voltage measurement CT.

page 138

TCRO RANGE


TCRO 80120

Bar : 120 x 80

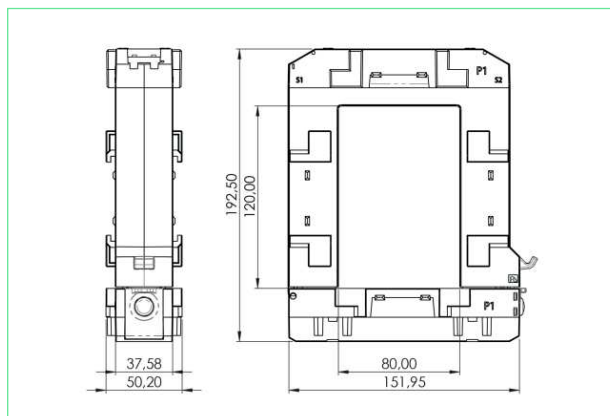

TCRO 80160

Bar : 160 x 80

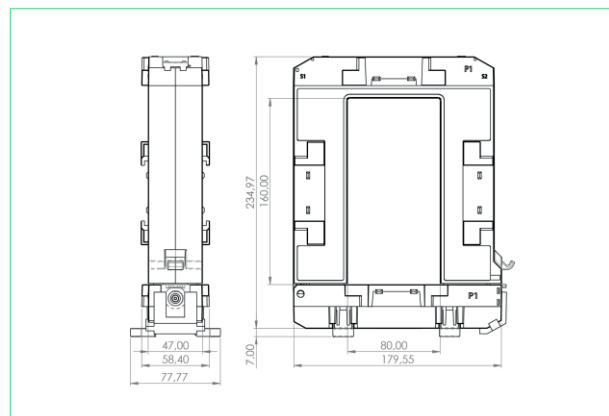

Power VA in Class

Primary	0.5	1	3
500/5A	-	4	12
800/5A	3	7	18
1000/5A	5	9	20
1200/5A	6	11	24
1500/5A	8	17	30

Power VA in Class

Primary	0.5	1	3
1500/5A	15	20	25
2000/5A	15	20	25
2500/5A	15	20	25
3000/5A	15	20	25

TO ORDER

Primary	Secondary 5 A
500/5A	P01340310
800/5A	P01340311
1000/5A	P01340312
1200/5A	P01340313
1500/5A	P01340314

Primary	Secondary 5 A
1500/5A	P01340315
2000/5A	P01340316
2500/5A	P01340317
3000/5A	P01340318

ASSOCIATED PRODUCTS



PRTC

CT short-circuiter

Protection against hazards due to opening of the secondary circuit of a low-voltage measurement CT.

page 138